




LED Hoisting line lights 40W

APPLICATION/DESCRIPTION

- * NEW DESIGN OR REPLACE OLD LAMP TO SAVING ENERGY
AND LONG DURATION TIMES

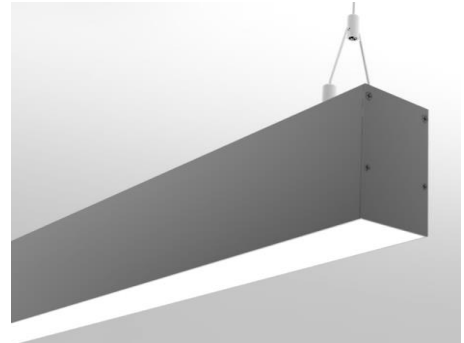

SPECIFICATION

BODY MATERIAL	: ALUMINUM
INPUT VOLTAGE	: 180-260 VAC
LED CHIP	: SMD
POWER	: 40W
LUMINOUS FLUX	: 4000lm
EFFICACY	: 100lm/W
COLOR RENDERING INDEX	: 70/80
LED COLOR TEMPERATURE	: 2700K / 4000k / 6000k
VIEW ANGLE	: 120°
THDi	: 15%
POWER FACTOR	: >0.95
WORKING TEMPERATURE	: -10° - 50°C
LIGHTING SOURCE LIFE	: 30,000 hrs.
COVER	: MILKY
FINISH COLOR	: WHITE , BLACK , Alu. SILVER

STANDARD

TIS. 1955-2551 LIGHTING AND SIMILAR EQUIPMENT:

RADIO DISTURBANCE LIMITS

ISO 9001 CERTIFIED FOR QUALITY CONTROL GUARANTEE

RoHS


MODEL	LAMP		DIMENSION (mm.)			REMARK
	WATT	TYPE	W	L	H	
XZ-TEC001LSD01-120 40W	40	SMD	1190	75	54	



LED Hoisting line lights 40W DIMMABLE

APPLICATION/DESCRIPTION

- * NEW DESIGN OR REPLACE OLD LAMP TO SAVING ENERGY
AND LONG DURATION TIMES

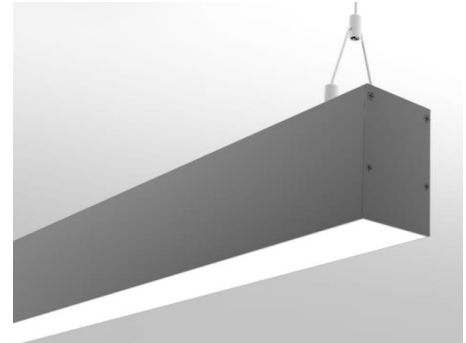

SPECIFICATION

BODY MATERIAL	: ALUMINUM
INPUT VOLTAGE	: 180-260 VAC
LED CHIP	: SMD
POWER	: 40W
LUMINOUS FLUX	: DIMMABLE
EFFICACY	: 100lm/W
COLOR RENDERING INDEX	: 70/80
LED COLOR TEMPERATURE	: 2700K / 4000k / 6000k
VIEW ANGLE	: 120°
THDi	: 15%
POWER FACTOR	: >0.95
WORKING TEMPERATURE	: -10° - 50°C
LIGHTING SOURCE LIFE	: 30,000 hrs.
COVER	: MILKY
FINISH COLOR	: WHITE , BLACK , Alu. SILVER

STANDARD

TIS. 1955-2551 LIGHTING AND SIMILAR EQUIPMENT:

RADIO DISTURBANCE LIMITS

ISO 9001 CERTIFIED FOR QUALITY CONTROL GUARANTEE

RoHS


MODEL	LAMP		DIMENSION (mm.)			REMARK
	WATT	TYPE	W	L	H	
XZ-TEC001LSD01-120 40W	40	SMD	1190	75	54	



LED Hoisting line lights 40W

APPLICATION/DESCRIPTION

- * NEW DESIGN OR REPLACE OLD LAMP TO SAVING ENERGY AND LONG DURATION TIMES

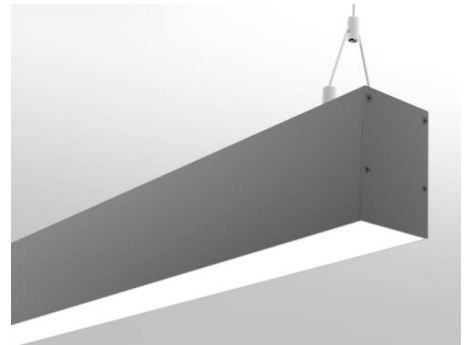

SPECIFICATION

BODY MATERIAL	: ALUMINUM
INPUT VOLTAGE	: 180-260 VAC
LED CHIP	: SMD
POWER	: 40W
LUMINOUS FLUX	: 4000lm
EFFICACY	: 100lm/W
COLOR RENDERING INDEX	: 70/80
LED COLOR TEMPERATURE	: 2700K / 4000k / 6000k
VIEW ANGLE	: 120°
THDi	: 15%
POWER FACTOR	: >0.95
WORKING TEMPERATURE	: -10° - 50°C
LIGHTING SOURCE LIFE	: 30,000 hrs.
COVER	: MILKY
FINISH COLOR	: WHITE , BLACK , Alu. SILVER

STANDARD

TIS. 1955-2551 LIGHTING AND SIMILAR EQUIPMENT:

RADIO DISTURBANCE LIMITS

ISO 9001 CERTIFIED FOR QUALITY CONTROL GUARANTEE

RoHS


MODEL	LAMP		DIMENSION (mm.)			REMARK
	WATT	TYPE	W	L	H	
XZ-TEC001LSD01-150 40W	40	SMD	1490	75	54	



LED Hoisting line lights 40W Dimmable

APPLICATION/DESCRIPTION

- * NEW DESIGN OR REPLACE OLD LAMP TO SAVING ENERGY
AND LONG DURATION TIMES

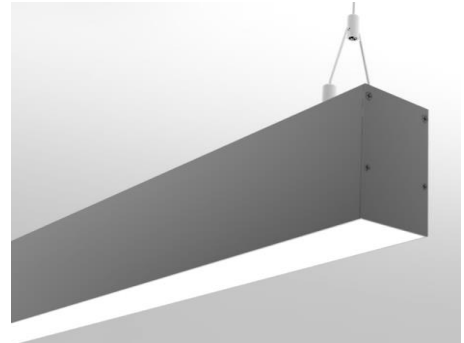

SPECIFICATION

BODY MATERIAL	: ALUMINUM
INPUT VOLTAGE	: 180-260 VAC
LED CHIP	: SMD
POWER	: 40W
LUMINOUS FLUX	: DIMMABLE
EFFICACY	: 100lm/W
COLOR RENDERING INDEX	: 70/80
LED COLOR TEMPERATURE	: 2700K / 4000k / 6000k
VIEW ANGLE	: 120°
THDi	: 15%
POWER FACTOR	: >0.95
WORKING TEMPERATURE	: -10° - 50°C
LIGHTING SOURCE LIFE	: 30,000 hrs.
COVER	: MILKY
FINISH COLOR	: WHITE , BLACK , Alu. SILVER

STANDARD

TIS. 1955-2551 LIGHTING AND SIMILAR EQUIPMENT:

RADIO DISTURBANCE LIMITS

ISO 9001 CERTIFIED FOR QUALITY CONTROL GUARANTEE

RoHS


MODEL	LAMP		DIMENSION (mm.)			REMARK
	WATT	TYPE	W	L	H	
XZ-TEC001LSD01-150 40W	40	SMD	1490	75	54	



LED Hoisting line lights 60W

APPLICATION/DESCRIPTION

- * NEW DESIGN OR REPLACE OLD LAMP TO SAVING ENERGY AND LONG DURATION TIMES

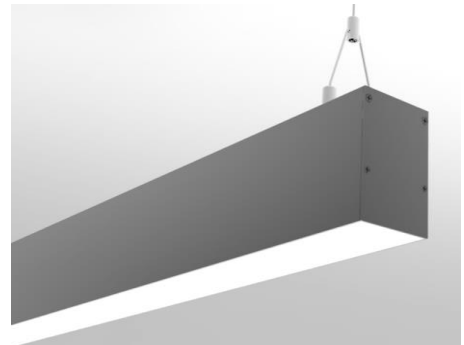

SPECIFICATION

BODY MATERIAL	: ALUMINUM
INPUT VOLTAGE	: 180-260 VAC
LED CHIP	: SMD
POWER	: 60W
LUMINOUS FLUX	: 6000lm
EFFICACY	: 100lm/W
COLOR RENDERING INDEX	: 70/80
LED COLOR TEMPERATURE	: 2700K / 4000k / 6000k
VIEW ANGLE	: 120°
THDi	: 15%
POWER FACTOR	: >0.95
WORKING TEMPERATURE	: -10° - 50°C
LIGHTING SOURCE LIFE	: 30,000 hrs.
COVER	: MILKY
FINISH COLOR	: WHITE , BLACK , Alu. SILVER

STANDARD

TIS. 1955-2551 LIGHTING AND SIMILAR EQUIPMENT:

RADIO DISTURBANCE LIMITS

ISO 9001 CERTIFIED FOR QUALITY CONTROL GUARANTEE

RoHS

MODEL	LAMP		DIMENSION (mm.)			REMARK
	WATT	TYPE	W	L	H	
XZ-TEC001LSD01-150 60W	60	SMD	1490	75	54	