




LED HIGHBAY UFO-SUN 100W

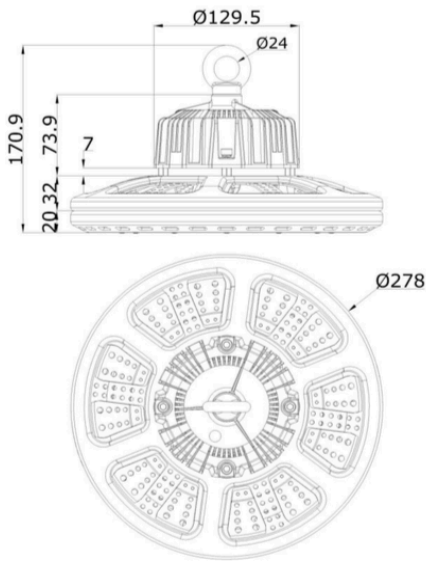

SPECIFICATION

MATERIAL	ALUMINIUM
INPUT VOLTAGE	AC 85-265V (50/60Hz)
LIGHT SOURCE LIFE	PHILIPS SMD 3030 LED
DRIVER	NON-ISOLATE INSIDE
QUANTITY	119 PCS
POWER RATING	100±5W
LUMINOUS FLUX	>14,000 lm
EFFICACY	>140 lm/W
COLOR TOLERANCE	≤7dB
COLOR RENDERING INDEX	>70
LED COLOR TEMPERATURE	2700K-6500K
BEAM ANGLE	45° 60° 90° 120°
POWER FACTOR	≥0.97
DIMENSION	Φ278.0*170.9mm
INSULATING RESISTANCE	>4MΩ(500V DC)

STANDARD

TIS. 1955-2551 LIGHTING AND SIMILAR EQUIPMENT:



RADIO DISTURBANCE LIMITS

ISO 9001 CERTIFIED FOR QUALITY CONTROL




LED HIGHBAY UFO-SUN 150W



SPECIFICATION

MATERIAL	ALUMINIUM
INPUT VOLTAGE	AC 85-265V (50/60Hz)
LIGHT SOURCE LIFE	PHILIPS SMD 3030 LED
DRIVER	NON-ISOLATE INSIDE
QUANTITY	196 PCS
POWER RATING	150±5W
LUMINOUS FLUX	>21,000 lm
EFFICACY	>140 lm/W
COLOR TOLERANCE	≤7dB
COLOR RENDERING INDEX	>70
LED COLOR TEMPERATURE	2700K-6500K
BEAM ANGLE	45° 60° 90° 120°
POWER FACTOR	≥0.978
DIMENSION	Φ328.0*178.5mm
INSULATING RESISTANCE	>4MΩ(500V DC)

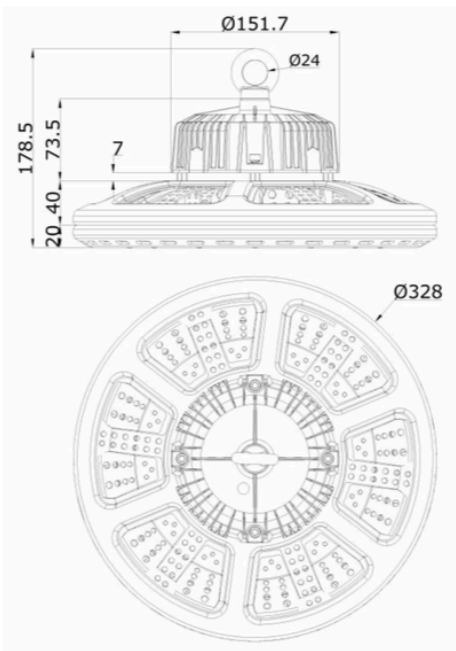

STANDARD

TIS. 1955-2551 LIGHTING AND SIMILAR EQUIPMENT:




RADIO DISTURBANCE LIMITS

ISO 9001 CERTIFIED FOR QUALITY CONTROL



LED HIGHBAY UFO-SUN 200W

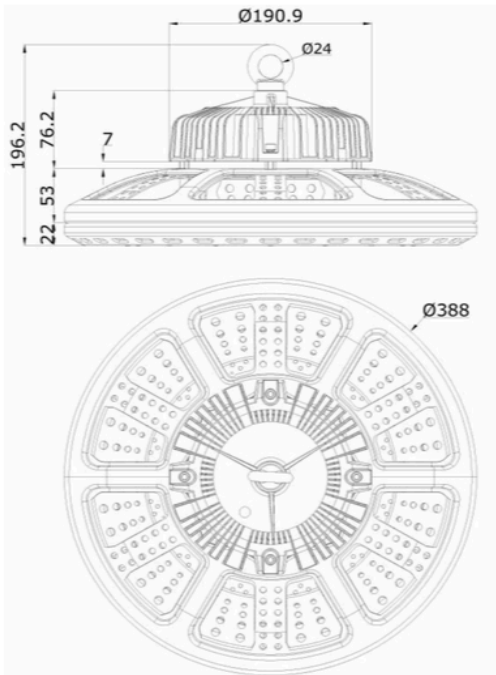

SPECIFICATION

MATERIAL	ALUMINIUM
INPUT VOLTAGE	AC 85-265V (50/60Hz)
LIGHT SOURCE LIFE	PHILIPS SMD 3030 LED
DRIVER	NON-ISOLATE INSIDE
QUANTITY	252 PCS
POWER RATING	100±5W
LUMINOUS FLUX	>28,000 lm
EFFICACY	>140 lm/W
COLOR TOLERANCE	≤7dB
COLOR RENDERING INDEX	>70
LED COLOR TEMPERATURE	2700K-6500K
BEAM ANGLE	45° 60° 90° 120°
POWER FACTOR	≥0.978
DIMENSION	Φ388.0*201.5mm
INSULATING RESISTANCE	>4MΩ(500V DC)

STANDARD

TIS. 1955-2551 LIGHTING AND SIMILAR EQUIPMENT:



RADIO DISTURBANCE LIMITS

ISO 9001 CERTIFIED FOR QUALITY CONTROL